



Heel Lock Down- Installation and Use

WARNING: Not intended for downhill skiing. Heel Lock Down is designed for skating, side stepping, and traversing. Climbing wire may deform and release with too high a load applied to the binding with heel locked.


1. Neutral Position





2. Pull Riser Wire forward and up until wire snaps into place as shown

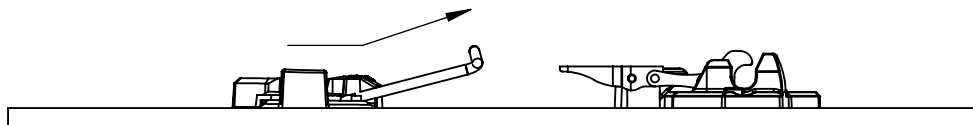

3. Open Heelstay lever on binding

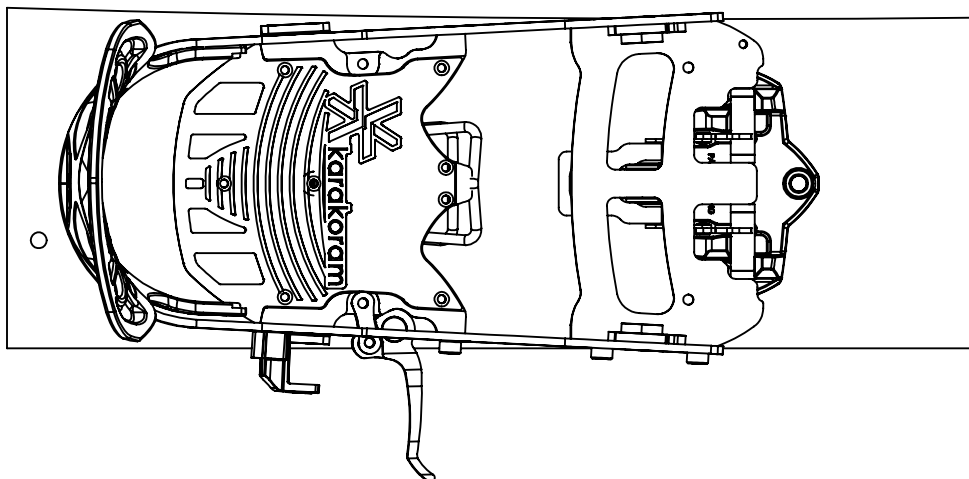

4. Close Heelstay lever allowing Seam Pin to catch under Riser Wire

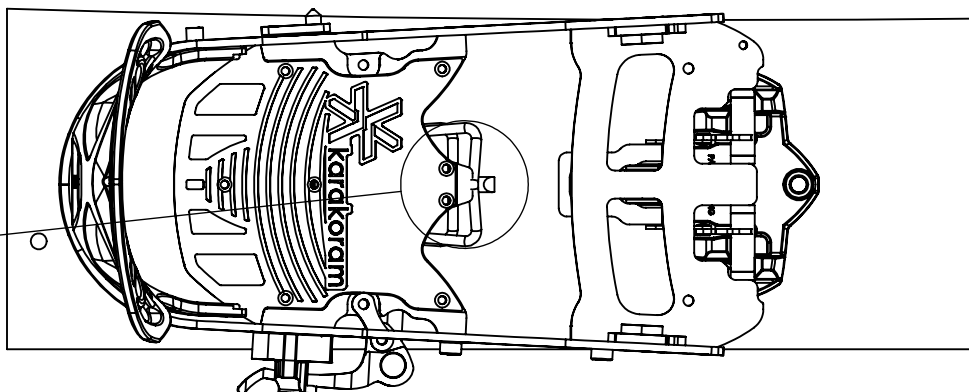

5. Return Riser Wire to Neutral Position before lifting Riser Wire to Raised Position

