


# Prime Splitboard System


Assembly and Use Instructions  
Patented US8469372B2 and Patents Pending

## Size Chart:


Small: 6-8  
Medium: 8.5-11  
Large: 11.5-13  
Women's: W6-W8

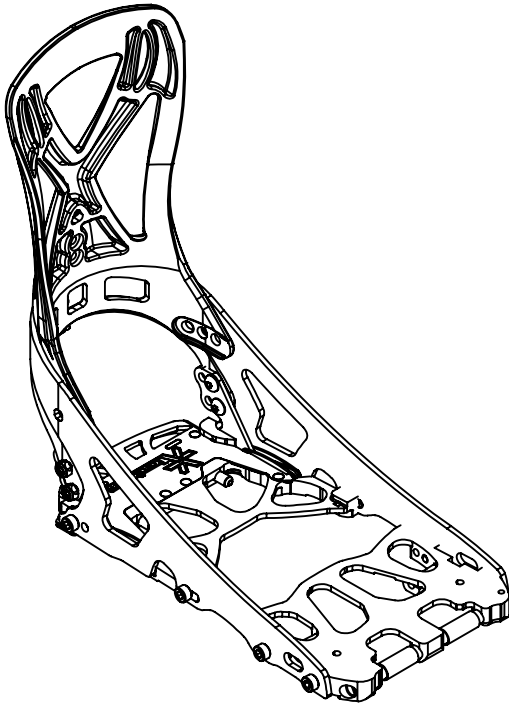


**2x Bindings (L and R)**

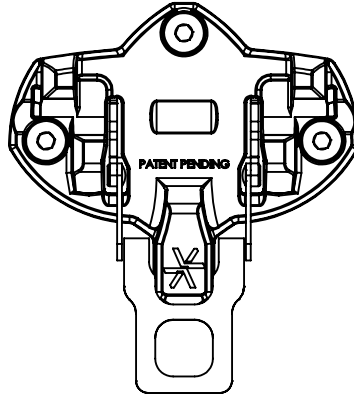


**2x Tour Modes**

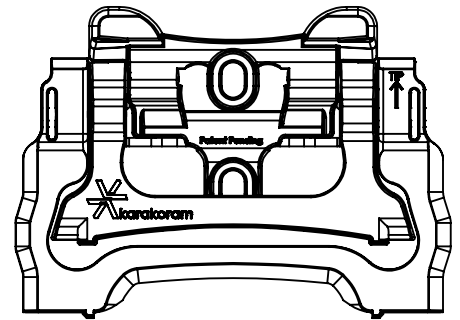


**2x Flip-Speed Risers with Heel Lockdown**



**2x Toe Attachments**



**2x Heel Attachments**

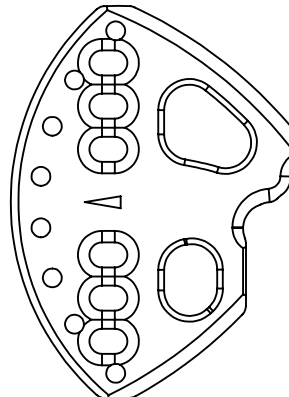



**4x Solid-Ride Plates**



Scan QR Code for video instructions or visit [www.splitboardbindings.com](http://www.splitboardbindings.com)

## Hardware:

- 6x**  M6x10mm Buttonhead Screw  
Tour Mode
- 10x**  M6x8mm Buttonhead Screw  
4x for Flip-Speed Riser  
6x extra for Tour Mode with thin core boards
- 8x**  M6x10mm Flathead Screw  
Ride Mode
- 8x**  M6x6mm Buttonhead Screw  
Heel and Toe Attachments

## Tools:


- M4 Allen Wrench (Binding Hardware, Interfaces)
- M3 Allen Wrench (Highback Fwd Lean, Heel Lever Size Adjustment)
- Crescent Wrench or 11mm socket (Heel Lever Size Adjustment)

## Disclaimer:


Snowboarding is an inherently dangerous and hazardous sport and can result in serious injury or death. Karakoram shall have no liability for injuries sustained by use or mis-use of this product. The user takes full responsibility for learning proper backcountry travel and avalanche safety.

# Production Splitboard Installation


1.

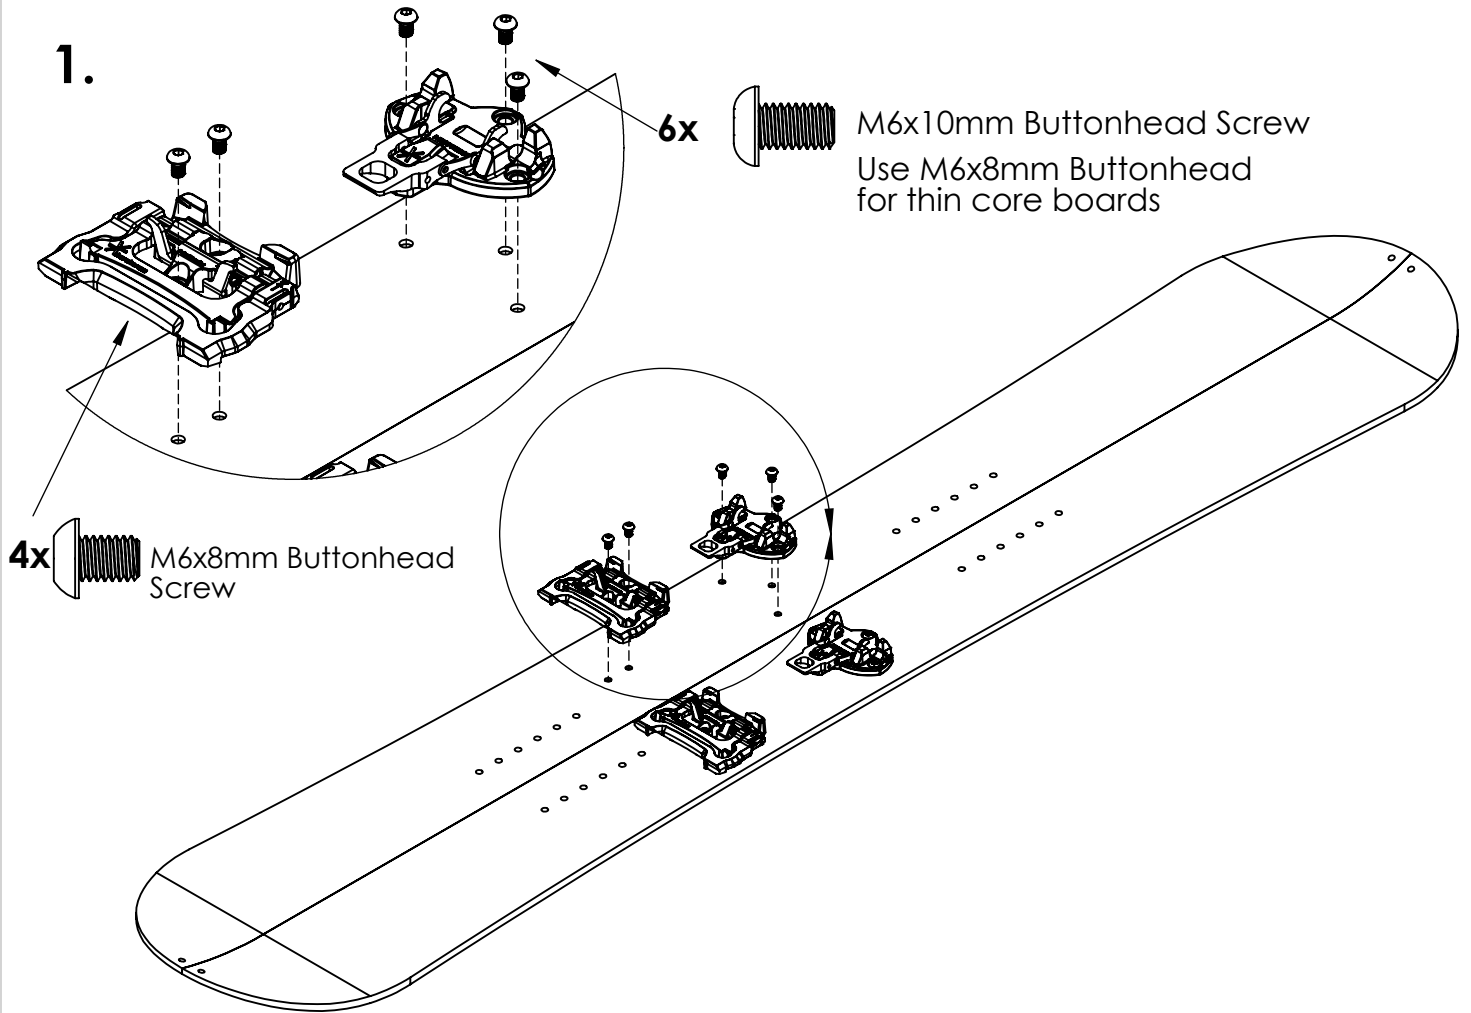


2.


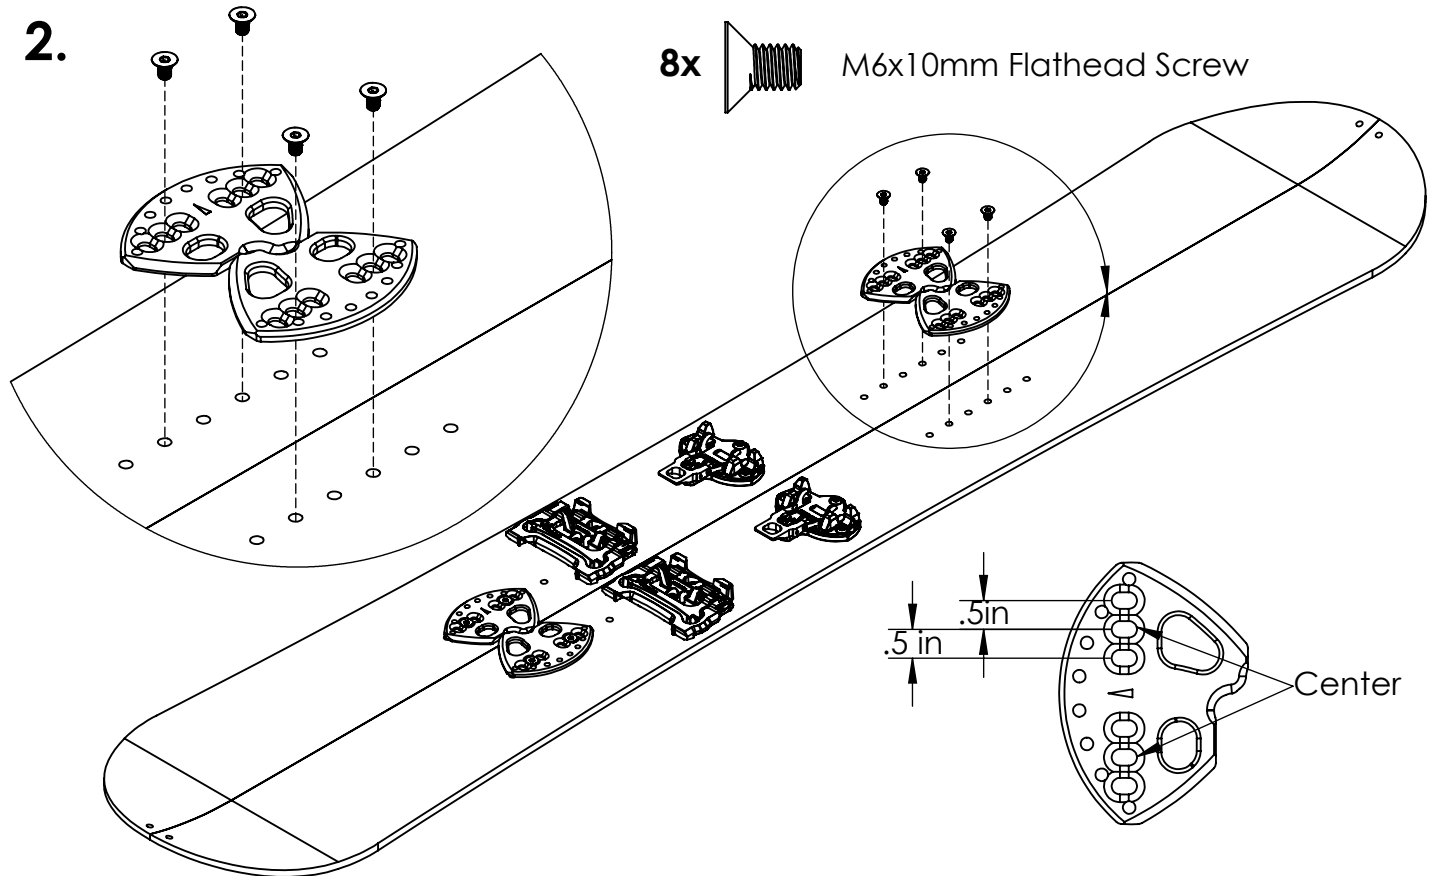


3.

8x  M6x6mm Buttonhead Screw

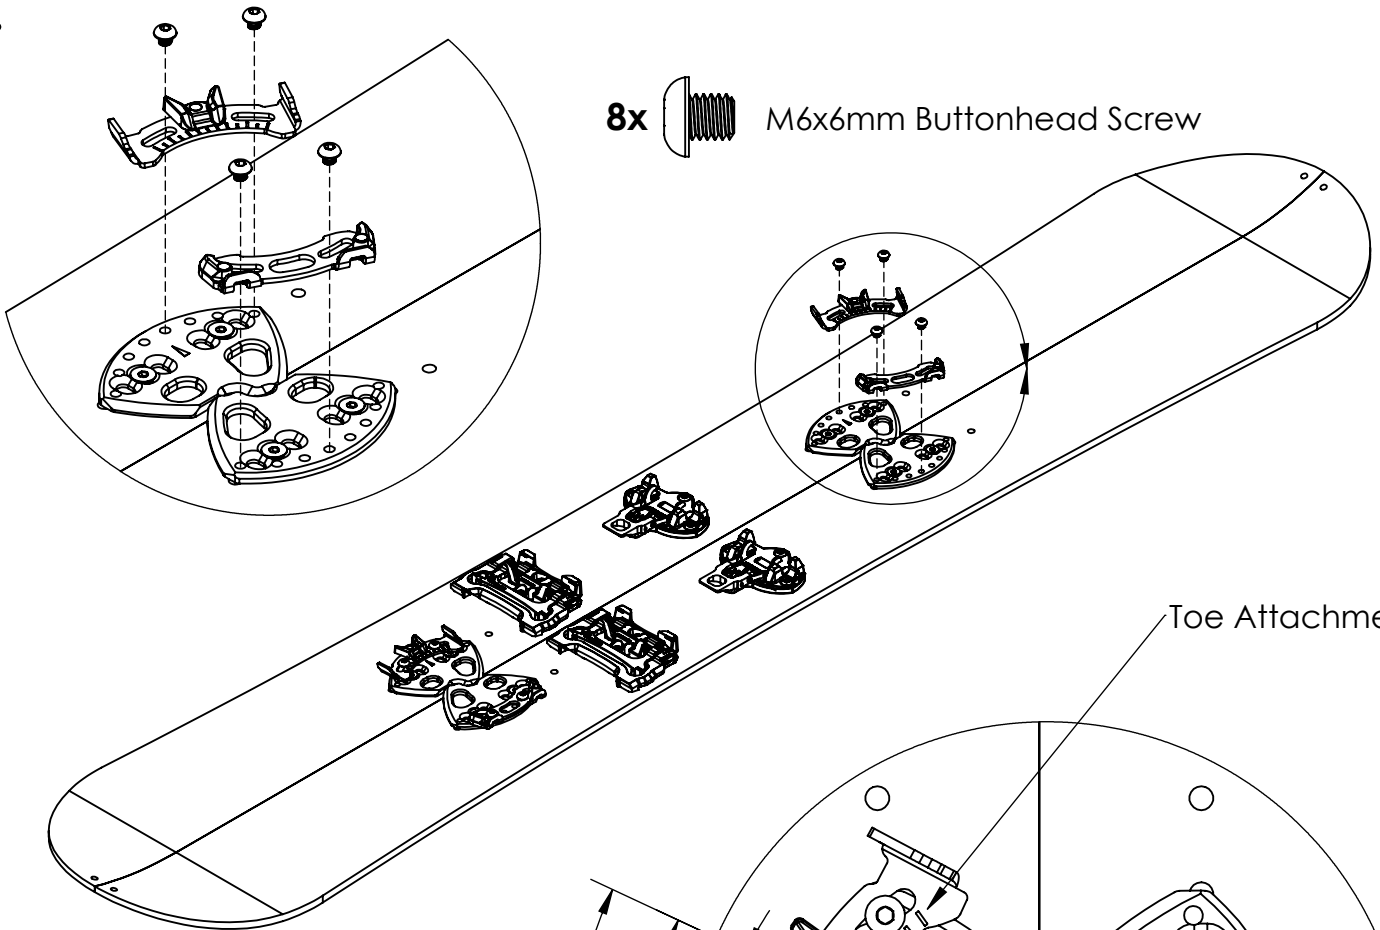

1. Tighten Toe Attachment to desired angle (hash marks in 5° increments)
2. Leave Heel Attachment loose

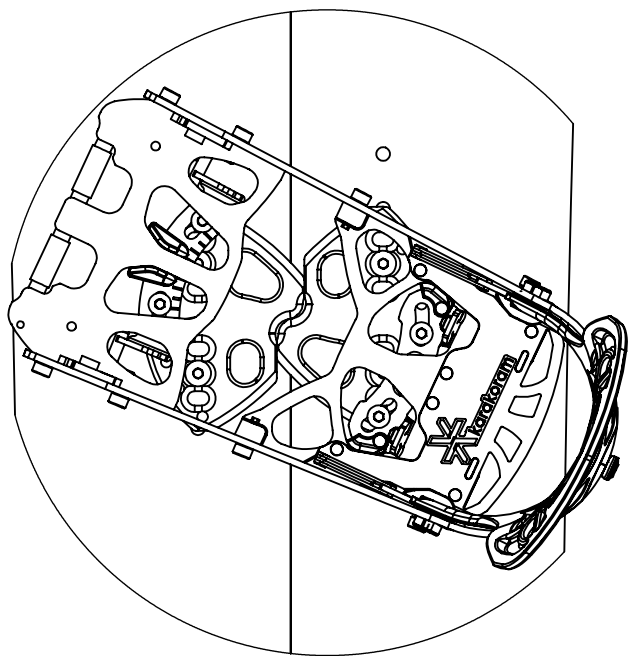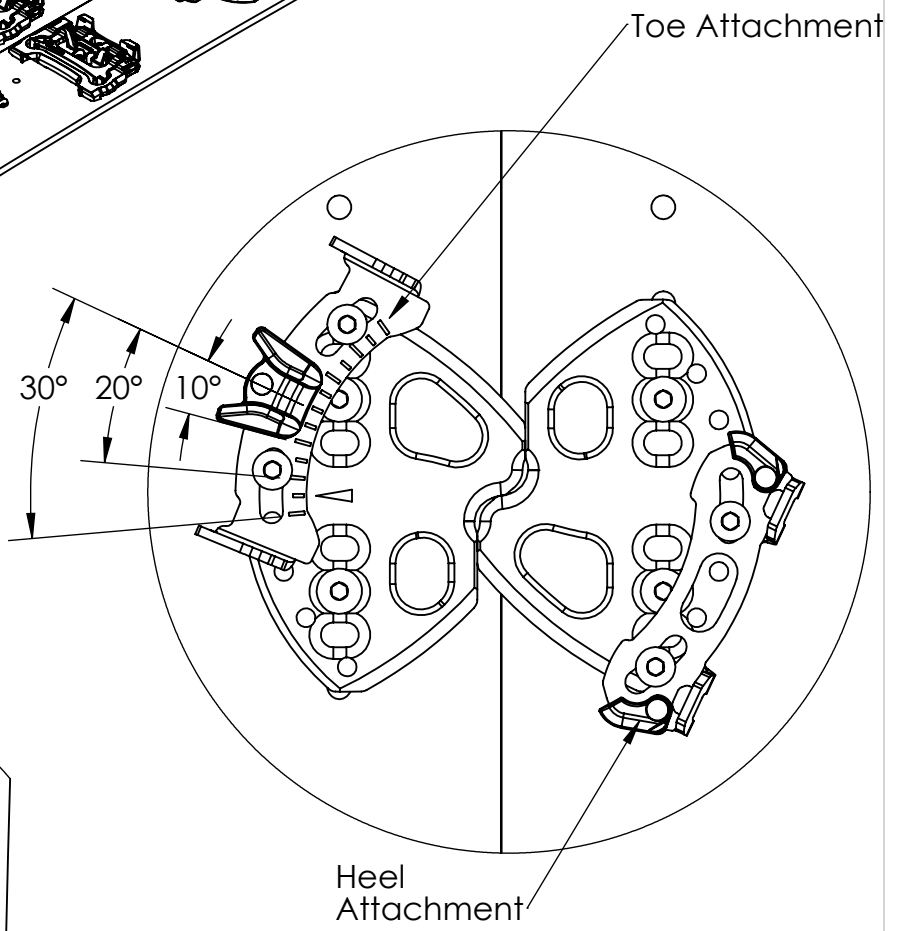


3. Mount Binding to align Heel Attachment
4. Tighten screws on Heel Attachment

## 4. Binding Size Adjustment

### SMALL POSITION

#### Size Setting:


S: 6-7  
M: 8.5-9.5  
L: 11.5  
W: W6-W7

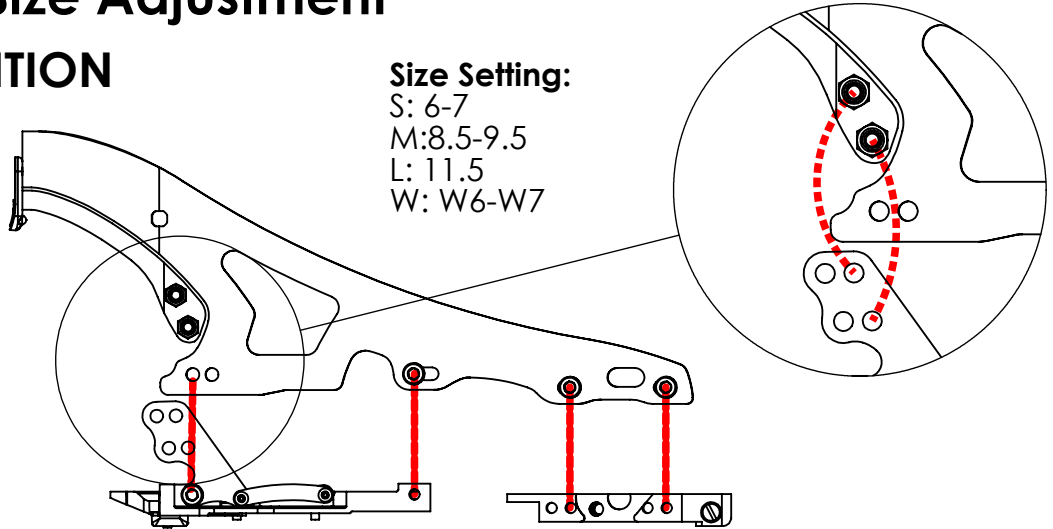

### LARGE POSITION

#### Size Setting:


S: 7-8  
M: 9.5-11  
L: 12-13  
W: W7-W8

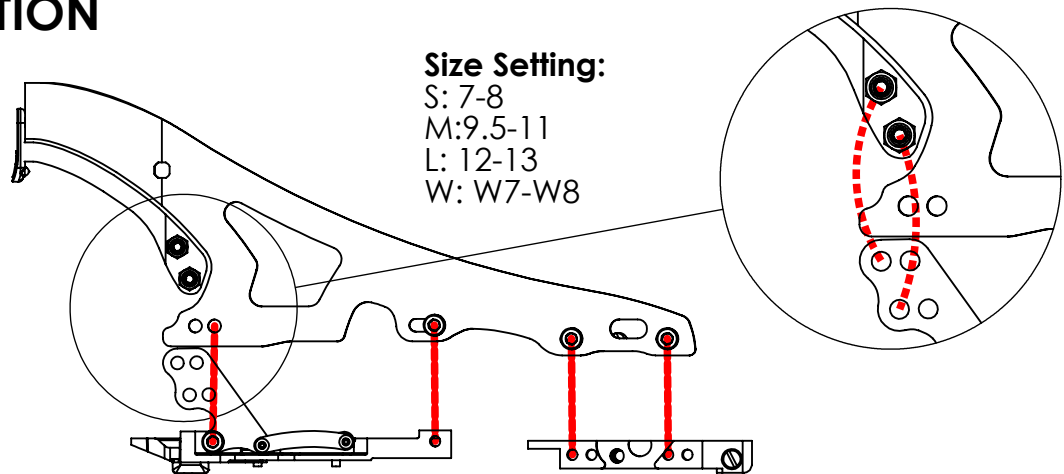

## 5. Binding Adjustment




Only adjust if binding is too tight to mount to Ride Mode or if binding is loose on ride mode.

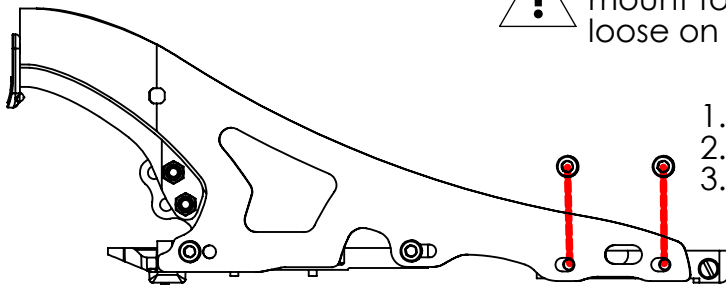


1. Loosen Toestay screws
2. Adjust Toestay fore/aft as desired
3. Tighten Toestay screws

## Forward Lean Adjustment:


Bindings come set at 12° fwd lean

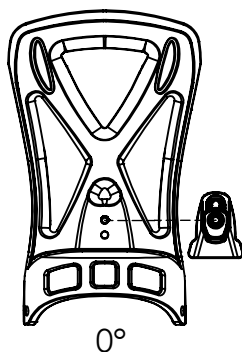

0°



10°





22°


# Prime Splitboard System Use Instructions

## Ride Mode:

1. Open Heelcup Lever
2. Attach binding to Ride Mode, aligning Toe Pins and Ride Mode Toe Attachment

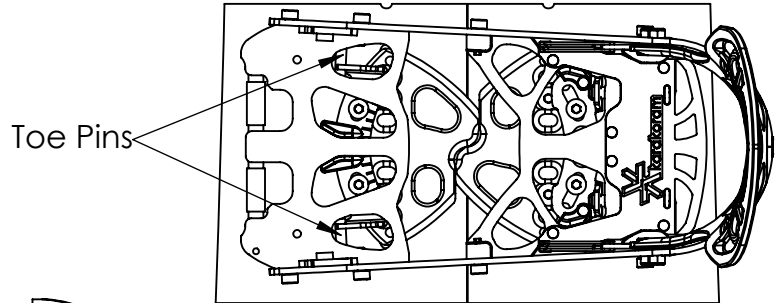
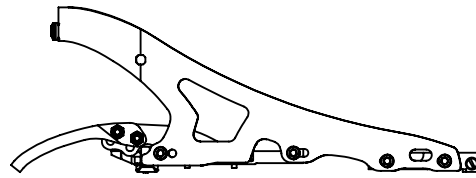


3. Close Heel Lever and Safety

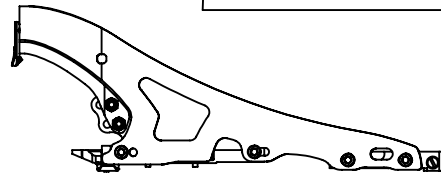

## Tour Mode:

1. Lift Tour Mode Lever
2. Align Toe Pin in cradle of Tour Mode
3. Rotate heel of binding downward to close Tour Mode Lever
4. Check that Tour Mode Lever has popped over-center

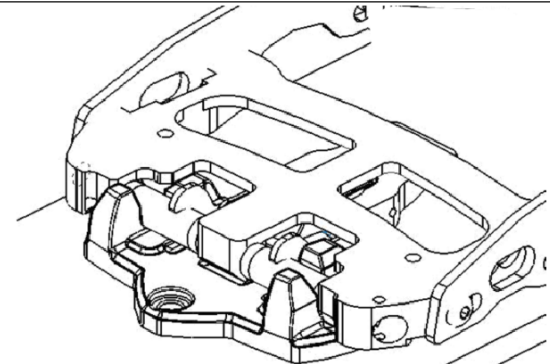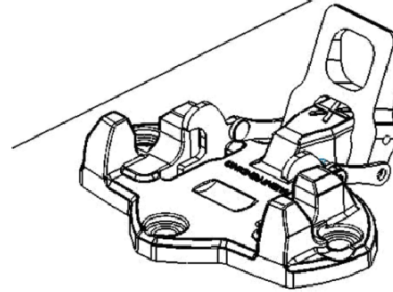

## Flip-Speed Riser:

### Operation:

1. Slide basket of ski pole under tall riser to flip up
2. Flip riser to short position or long position with tip of ski pole
3. Lower riser by pushing on tall riser towards tail of ski

### Heel Lock Operation:

1. Tour with Heelcup Lever open
2. Close Heelcup Lever to engage pins with Heel Lock

